




WALINGA[®] INC.
ULTRA-VACS

FOR MAXIMUM LOADING CAPABILITIES

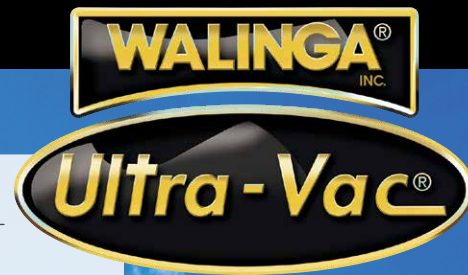

STANDARD ACCESSORIES

- Hydraulically raised and rotated truck loading kit with Rhino Lined boom cyclone
- Three 12' (3.65 m) stainless steel delivery lines
- One suction nozzle (Two on 7614D HD)
- One 12' (3.65 m) rubber cleanup hose
- One suction nozzle with cleanup attachment
- Hose carrier
- Tube carrier
- 6" (150 mm) cleanup hose package
- Self contained hydraulics
- Dual inlets
- Electric Brakes

AVAILABLE OPTIONS

- 5th Wheel type hookup
- Dual Blower System
- Full Rhino Lined Receiver Tank
- L.E.D. Light Package
- Boom and Control Module Work Lights
- Dust Suppression
- Sound Reduction
- Telescoping Suction Boom
- Remote Controlled Hydraulics
- Video Monitoring System



HD

**SPECIFICATIONS FOR:
Walinga Pneumatic Grain Moving Unit Models 6614D, 7614D HD & 7614D HD TWIN**

	6614D	7614D HD	7614D HD TWIN
Height	274 cm	274 cm	274 cm
Width	254 cm	254 cm	254 cm
Length	470 cm	470 cm	470 cm
Weight	3727 kg	3864 kg	4318 kg
Discharge Height	4m maximum	4m maximum	4m maximum
Line Size	5" & 6"	6" & 7"	6" & 7"
Axles	Two @ 3176 kg each	Two @ 3176 kg each	Two @ 3176 kg each
Tires Rims	Four - Radial Tires 8 Bolt 16 x 9	Four - Radial Tires 8 Bolt 16 x 9	Four - Radial Tires 8 Bolt 16 x 9
Brakes	4 Wheel Electric	4 Wheel Electric	4 Wheel Electric
Frame	50 cm x 150 cm tubular	50 cm x 150 cm tubular	50 cm x 150 cm tubular
Blower	614 Walinga Super Chrome SRT positive displacement blower	614 Walinga Super Chrome SRT positive displacement blower	614 x2 Walinga Super Chrome SRT positive displacement blowers
Airlock	1618 cast iron shell, precision machined housing, 10 vane rotor hardox steel tips, hydraulically driven, reversible rotation	2018 cast iron shell, precision machined housing, 10 vane rotor hardox steel tips, hydraulically driven, reversible rotation	2018 cast iron shell, precision machined housing, 10 vane rotor hardox steel tips, hydraulically driven, reversible rotation
Engine	John Deere, Model 6068HF with 170 hp (127 kW) or equivalent	John Deere, Model 6068HF with 185 hp (138 kW) or equivalent	John Deere, Model 6068HF with 200 hp (147 kW) or equivalent
Drive	NACD Clutch connected to belts	NACD Clutch connected to belts	NACD Clutch connected to belts
Hydraulics	Heavy duty gear type pump, filter, hoses, controls, etc.	Heavy duty gear type pump, filter, hoses, controls, etc.	Heavy duty gear type pump, filter, hoses, controls, etc.
Receiver	2 piece, Rhino Lined Dual inlets	2 piece, Rhino Lined Dual inlets	2 piece, Rhino Lined Dual inlets
Safeguards	Pressure and vacuum overload protection valves. Appropriate operation and warning decals. Appropriate belt guards.	Pressure and vacuum overload protection valves. Appropriate operation and warning decals. Appropriate belt guards.	Pressure and vacuum overload protection valves. Appropriate operation and warning decals. Appropriate belt guards.



Due to continuous product development, specifications are subject to change without notice. Some items shown may be optional. *Capacities based on using 12' (3.65 m) suction line and truck loading kit. Capacity will vary with condition of product.

For Maximum LOADING CAPABILITIES

8614D

SPECIFICATIONS FOR: Walinga Pneumatic Grain Moving Unit Model 8614D

	8614D
Height	353 cm
Width	257 cm
Length	754 cm
Weight	5670 kg
Discharge Height	4m maximum
Line Size	7" and 8"
Axles	Two @ 3176 kg each
Tires	Four - Radial Tires
Rims	8 bolt 16 x 9
Brakes	4 Wheel Electric
Frame	50 cm x 150 cm tubular
Blower	Two Chrome Hardened 614 SRT Blowers
Airlock	2224 Cast Iron Drop Thru
Engine	250 hp (186 kW) John Deere Diesel Engine
Drive	NACD clutch to belts
Hydraulics	Heavy duty gear type pump, filter, hoses, controls, etc.
Receiver	2 piece Rhino Lined Dual Inlets
Safeguards	Pressure and Vacuum overload protection valves. Appropriate operation and warning decals. Appropriate belt guard.



STANDARD ACCESSORIES

- Hydraulic Boom Rotation and lift with Rhino Lined Boom Cyclone
- Hose carrier
- 7" cleanup hose package
- Extra-Thick chrome SRT (Sound Reduction Type) blower
- Precleaner
- Dual inlets
- Self contained hydraulics
- Fully rhino lined receiver tank, boom elbow and boom cyclone
- Hydraulic-rotating truck loading kit with cyclone
- Three 8" dia. x 12' stainless steel delivery line
- One 8" dia. suction nozzle
- One 7" dia. x 12' rubber clean-up hose
- One 7" dia. suction nozzle with clean-up attachment
- One 7" to 8" adapter



Suction Nozzle

Floor Sweep Nozzle

Due to continuous product development, specifications are subject to change without notice. Some items shown may be optional.
*Capacities based on using 12' (3.65 m) suction line and truck loading kit. Capacity will vary with condition of product.

www.customvac.com.au



Head Office

Customvac Australia
24 Molloy Street
Toowoomba, Qld 4350
Tel: 1800 242 699
Tel: 07 4634 7344
mail@customvac.com.au

Sales Team

Northern Region - Darren Tyson 0427 347 344 - darren@customvac.com.au
Southern Region - Chris Dignan 0409 347 344 - chris@customvac.com.au
Western Region - 1800 242 699 - mail@customvac.com.au